




### **GC60 Hampton Freestanding Cast Iron Pellet Stove**



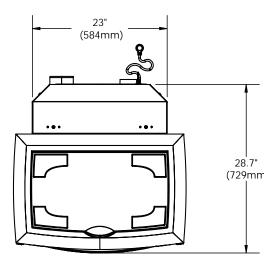

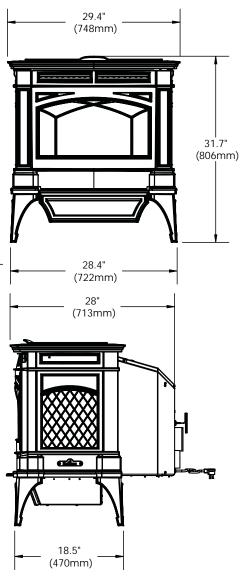

### **CLEARANCES TO COMBUSTIBLES**

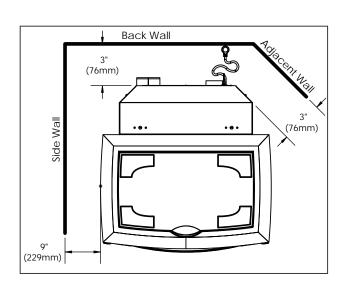

These dimensions are minimum clearances but it is recommended that you ensure sufficient room for servicing, routine cleaning and maintenance.

Side wall to unit	9 inches	(22.9 cm)
Back wall to unit	3 inches	(76 cm)
Corner to unit	3 inches	(76 cm)
Ceiling height	60 inches	(152 cm)
AI AI : D !!	20.	. (0.4
Alcove Maximum Depth	36 inches (91 cm)	
Alcove Minimum Width	48 inches (122 cm)	

Alcove Minimum Height

The unit must be installed with a minimum of 6" (152 mm) of floor protection in front of and to the sides of the door opening.


60 inches (152 cm)




GF60 Wood Pellet Stove

### MOBILE HOME INSTALLATION

- Secure the heater to the floor using the four (4) holes in the pedestal.
- Ensure the unit is electrically grounded to the chassis of your home (permanently).
- Do not install in a room people sleep in.
- Outside fresh air is mandatory. Secure outside air connections directly to fresh air intake pipe and secure with three (3) screws evenly spaced.
- All specified components must be used. Do not use any components other than what's specified.

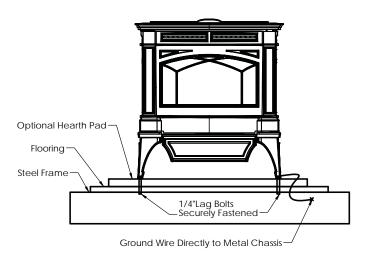

# EXHAUST AND FRESH AIR INTAKE LOCATION

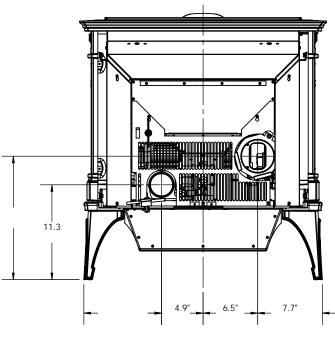

This unit uses a 4" exhaust vent.

### **EXHAUST:**


Base of unit to center of flue  $15\frac{1}{2}$ " (392 mm) Center of unit to center of flue  $6^{3}/8$ " (162 mm)

#### FRESH AIR INTAKE.

Base of unit to center of intake 12'' (305 mm) Center of unit to center of intake  $4^{7}/8''$  (126 mm)



## THROUGH WALL WITH VERTICAL RISE AND HORIZONTAL TERMINATION INSTALLATION:

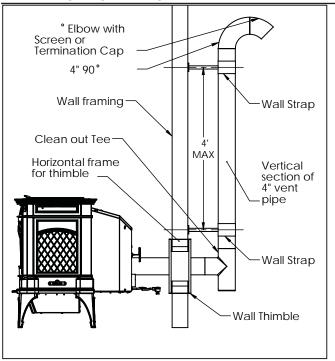

THROUGH CONCRETE WALL WITH VERTICAL RISE INSTALLATIONS:

